



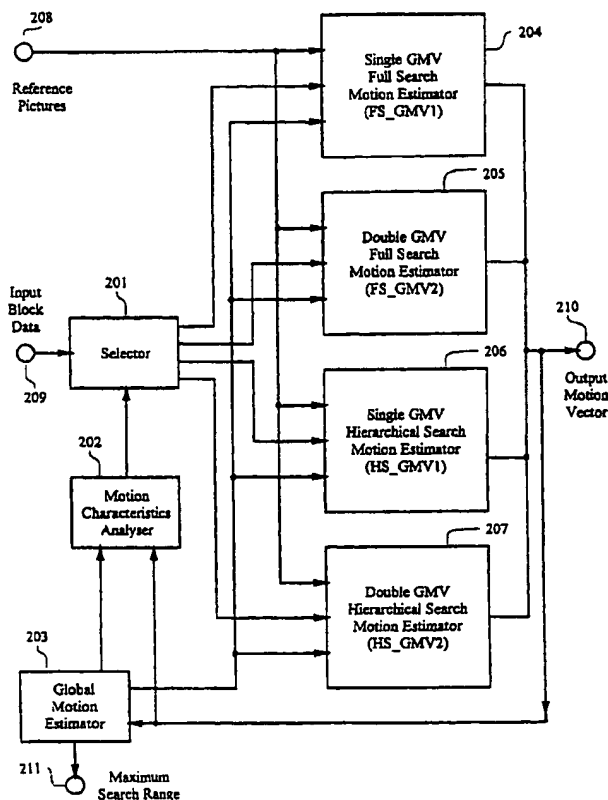
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 7/36	A1	(11) International Publication Number: WO 00/70879 (43) International Publication Date: 23 November 2000 (23.11.00)
(21) International Application Number: PCT/SG99/00041 (22) International Filing Date: 13 May 1999 (13.05.99) (71) Applicant (for all designated States except US): STMICRO-ELECTRONICS ASIA PACIFIC PTE LTD. [SG/SG]; 28 Ang Mo Kio Industrial Park 2, Singapore 569508 (SG). (72) Inventors; and (75) Inventors/Applicants (for US only): OH, Hong, Lye [SG/SG]; Block 455 Sin Ming Avenue, #07-483, Singapore 570455 (SG). HUI, Yau, Wai, Lucas [SG/SG]; 10H Braddell Hill #24-31, Singapore 579727 (SG). (74) Agent: DONALDSON & BURKINSHAW; P.O. Box 3667, Singapore 905667 (SG).		(81) Designated States: JP, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: ADAPTIVE MOTION ESTIMATOR

(57) Abstract

A method and apparatus of encoding digital video according to the ISO/IEC MPEG standards (ISO/IEC 11172-2 MPEG-1 and ISO/IEC 13818-2 MPEG-2) using an adaptive motion estimator. A plurality of global motion vectors are derived from the motion vectors of a previous picture in a sequence, and the global motion vectors are analysed to determine motion characteristics. The video encoding is arranged to enable switching among different types of local motion estimators based on the motion characteristics of the moving pictures sequence. This gives rise to a motion estimation algorithm that can adaptively change its search range, search area and block matching scheme to suit different types of moving sequences.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Adaptive Motion Estimator

Field of the Invention

The present invention relates to a method and apparatus for encoding moving pictures
5 sequences. In particular, the present invention relates to a method and apparatus for motion
estimation and motion compensation in a video signal compression system.

Background of the Invention

Methods for encoding moving pictures or video such as the MPEG1, MPEG2, H.261, and
10 H.263 standards have been developed for efficient data transmission and storage. A detailed
description of one such encoding method is found in MPEG2 Test Model 5, ISO/IEC
JTC1/SC29/WG11/N0400, April 1993, and the disclosure of that document is hereby
expressly incorporated herein by reference. In the described encoding method, an input video
sequence is organized into a sequence layer, group-of-pictures (GOP), pictures, slices,
15 macroblocks, and finally block layer. Each picture is coded according to its determined
picture coding type. The picture coding types used include intra-coded picture (I-picture),
predictive-coded picture (P-picture), and bi-directionally predictive-coded picture (B-picture).

Motion estimation/compensation, transform coding, and statistical coding are utilized to
20 efficiently compress the input video sequence. For example in MPEG2 Test Model 5, each
picture from the input video sequence is partitioned into rows of smaller and non-overlapping
macroblocks of picture elements (pixels). Macroblocks in each row may be grouped into one
or more slices. The compression is performed on each macroblock on a row-by-row basis
starting from the leftmost macroblock to the rightmost macroblock, and the top row to the
25 bottom row.

In the motion estimation/compensation method, motion vectors are detected for each
macroblock in a picture. The coding mode for a macroblock (e.g. intra-coded, forward-
predicted, backward-predicted, or interpolated) is decided based on the detected motion
30 vectors and the determined picture coding type. The utilized motion vectors are differentially

- 2 -

coded with variable length codes before outputting.

A typical motion vector detection process comprises determining, for each macroblock to be coded, a search window consisting of pixels from a reference picture and matching pixel values of the macroblocks to blocks of pixel values obtained from the search window. This process is known to be computationally intensive. Particularly, the size of the search window has a direct impact to the computation load.

Many methods of matching the pixel blocks are available, such as an exhaustive search method which compares every definable block within the search window, a logarithmic search method, a hierarchical search, and various other possible derivations. Depending on application requirements, a search method may be selected based on its performance in terms of accuracy and computation complexity.

To cater for sequences with large object movements between pictures, methods exist to increase the search range without enlarging the search window. These methods typically incorporate some form of prediction into the motion vectors, based on certain assumptions, to provide greater accuracy motion vectors for picture sequences with large movements without a large increase in computation load. One such method is the telescopic search method in which the motion vectors of macroblocks from a previously coded or matched picture are used to generate a new search window for each current macroblock. The telescopic search method comprises the steps of obtaining a motion vector from a co-sited macroblock from a closest coded picture; optional scaling of the obtained motion vector according to the picture distances between the reference picture, the closest coded picture, and the current picture; and defining the search window based on the centre position of the current macroblock plus an offset defined by the scaled motion vector.

Alternate methods of determining search windows are disclosed in United States Patents 5,473,379 and 5,657,087, for example. The methods disclosed therein comprise the steps of calculating a global motion vector based on the motion vectors of a previous picture, and

- 3 -

offsetting search windows of all macroblocks by the calculated global motion vector. The global motion vector may be determined by the mean or the median function, or by the most common motion vector of the previous picture; it can be further normalized according to the picture distances. The calculated global motion vector may then represent a global
5 translational motion of objects from one picture to the other.

There are also hybrid motion estimators which combine both full search and hierarchical search to take advantage of the accuracy of full search and wide coverage of hierarchical search under a certain hardware limitation. For example, US Patent 5,731,850 discloses a
10 system in which either full search or hierarchical search is chosen based on the search range imposed on various picture types. A full search is chosen if the search range assigned to that picture is below a certain threshold, else a hierarchical search is chosen.

Current arts use a fixed search range and one set of search windows for the various picture
15 types in encoding a moving sequence, which fails to address the problem of varying motion characteristics within a moving sequence. A sequence may consist of segments with different characteristics: one segment may consist of slow moving objects with stationary background, another may consist of fast moving objects with stationary background, yet another with fast moving objects and background, and many other combinations. With such complex motion
20 characteristics, having a fixed search range for individual picture types is inefficient as it over services during the slow moving segments while under servicing fast moving segments. This results in non-uniform motion estimator performance and inefficient bit allocation to coding the motion vectors. All these factors will lower the general performance of the encoder and also result in non-uniform output bitstreams quality.

25

Motion estimators of the type disclosed in US Patent 5,731,850 can use a hybrid of full search and hierarchical search to take advantage of the accuracy of full search and wide coverage of hierarchical search, but the search range is still pre-assigned and does not take account of the possible different motion characteristics of a moving sequence. Thus, this
30 form of motion estimator will not have a good adaptability to moving sequences with large

- 4 -

motion variances. The motion estimator therein disclosed is more concerned in offering trade-off in accuracy and wide coverage given a certain hardware limitation and a pre-assigned search range.

5 Methods utilising the global motion vector such as disclosed in the aforementioned US Patents 5,473,379 and 5,657,087 may be used to minimise search window cache size as well as the bandwidth requirement from the frame memory while expanding the actual search range. These methods fix the offset of the search window for all macroblocks in a picture. However, given that only one global motion vector is used for the offset of all search
10 windows in a picture, the search range expansion works well only with pictures containing uniform translational motion. Pictures with zooming, rotational motion, sheering effects and pictures with more than one group of translational motions are not well exploited.

Summary of the Invention

15 In accordance with the present invention, there is provided a method for improved data block matching in a moving pictures encoder for encoding a sequence of pictures each comprising a plurality of data blocks, comprising the steps of:

processing at least a picture in the sequence to obtain block motion vectors for the data blocks therein with respect to a reference picture;

20 generating a plurality of global motion vectors for the picture, each global motion vector being generated from a plurality of block motion vectors from a respective group of related blocks in the picture;

analysing the global motion vectors to determine a metric representing a distribution pattern thereof;

25 selecting a motion estimation scheme from amongst a plurality of motion estimation schemes, for data block matching of at least one subsequent picture in the sequence; and

performing data block matching of at least one subsequent picture in the sequence using the selected motion estimation scheme, said global motion vectors and preselected search window characteristics.

- 5 -

The present invention also provides a moving pictures encoder for encoding a sequence of pictures each comprising a plurality of data blocks, including an adaptive data block matching apparatus comprising:

5 a global motion estimator coupled to receive block motion vectors for data blocks of a previously processed picture with respect to a reference picture for generating a plurality of global motion vectors for the picture, each global motion vector being generated from a plurality of block motion vectors from a respective group of related blocks in the picture;

a motion characteristics analyser coupled to receive the global motion vectors from the global motion estimator for analysing the global motion vectors to determine a metric
10 representing a distribution pattern thereof;

a selector coupled to receive the distribution pattern metric from the motion characteristics analyser for selecting a motion estimation scheme from amongst a plurality of motion estimation schemes, for data block matching of at least one subsequent picture in the sequence; and

15 a plurality of motion estimators controlled by said selector and coupled to receive said global motion vectors for performing data block matching of at least one subsequent picture in the sequence using the selected motion estimation scheme, said global motion vectors and preselected search window characteristics.

20 The present invention also provides a method for encoding moving pictures data from a sequence of moving pictures in which each picture in the sequence is represented by a plurality of data blocks corresponding to non-overlapping areas of the picture, the method comprising:

selecting a group of related data blocks from the plurality of data blocks of a picture;

25 for each data block in the selected group, obtaining a corresponding block motion vector from a previously processed picture in the moving pictures sequence;

determining a plurality of global motion vectors for the selected group, each of the global motion vectors being formed from a plurality of the corresponding block motion vectors;

30 analysing the global motion vectors and determining a metric representing a

- 6 -

distribution pattern thereof;

selecting a motion estimator scheme on the basis of the distribution pattern metric, the motion estimator scheme being selected from amongst a plurality of motion estimator schemes each having a different combination of search strategy and number of global motion vectors;

- 5 performing data block-matching with a reference picture using the selected motion estimator scheme to generate a block motion vector; and
encoding the picture data including the block motion vectors.

- 10 The present invention further provides a method for motion estimation for use in encoding a picture in a moving pictures sequence wherein data representing the picture in the sequence comprises a plurality of data blocks, the method comprising the steps of:

selecting a group of related data blocks from the plurality of data blocks of the picture;

for each data block in the selected group, obtaining a corresponding block motion

- 15 vector from a previously processed picture in the moving pictures sequence;

determining a primary global motion vector for the selected group from all of the corresponding block motion vectors;

classifying the block motion vectors from the selected group into a plurality of sub-groups;

- 20 determining a plurality of secondary global motion vectors corresponding to the respective sub-groups from the block motion vectors classified in the respective sub-groups;
and

selecting the primary and/or at least one of the secondary global motion vectors for use in defining one or more search windows for each block in the selected group to enable

- 25 block matching with a reference picture.

Embodiments of the present invention aim to provide:

an improved moving sequence encoding method and apparatus containing a motion estimator which can adaptively determine the motion estimation scheme best suited to the

- 30 moving sequence based on the motion characteristics;

- 7 -

an improved moving sequence encoding method or apparatus containing a motion estimator which can adaptively adjust the search range on the fly to suit the motion characteristics of the moving sequence; and

an improved moving sequence encoding method or apparatus containing a global
5 motion estimator with expanded search range and multiple search windows.

A preferred form of the present invention utilises a controller to determine which motion estimator to use, based on the motion characteristics of the moving sequence to achieve best output quality under a certain hardware limitation. The types of motion estimator which can
10 be utilised are various form of global motion estimators that utilise techniques such as full search, hierarchical search, telescopic search and group motion vectors prediction. The term "group" in this context refers to a plurality of macroblocks, for example slice(s), row(s), half-row etc. The term "motion characteristics" here refers, without limitation, to size of motion vectors, distribution pattern of motion vectors, statistical data of motion vectors belonging to
15 each group and relationships between global motion vectors representing each of these groups. With such a scheme, the search range used can be according to the motion characteristics of the moving sequence, for example large search range for fast motion and small search range for slow moving sequence, this will lead to a better allocation of bits between motion vectors and DCT coding.

20

An embodiment of the present invention utilises a global motion estimator which determines one or more global motion vectors that best represent one or more groups of MBs in a picture to be coded. The global motion estimator may determine the global motion vectors based on detected motion vectors from the corresponding group of MBs of a previously processed or
25 coded picture. Each determined global motion vector provides an offset to all search windows for all MBs in the group. The global motion vectors better adapt to motion variation within a picture and expand the effective search range of the motion estimator without increasing the search window size. Having more than one global motion vector enables cases of varying clusters of motion within a group to be covered. Of course, more global motion
30 vectors per group implies increased computation requirements if a similar search window size

- 8 -

is maintained, or a reduction in search window size if the same computational restrictions are maintained.

With the determined set of global motion vectors for a picture, a maximum offset vector can
5 be computed. The maximum offset vector is preferably the maximum of absolute values of
the horizontal and vertical components from the set of global motion vectors. Combining
maximum offset vector and the search window size, a maximum possible motion vector size
can be determined and therefore the corresponding Variable Length Coding (VLC) tables can
be selected for coding of motion vectors for the picture. Combining this with the ability to
10 adaptively change the search range/area according to different motion characteristics, the
VLC tables selected will be optimised for the types of motion in the picture and this optimises
the efficiency of the motion vector coding.

Brief Description of the Drawings

15 The invention is described in greater detail hereinafter, by way of example only, through
description of preferred embodiments thereof and with reference to the accompanying
drawings in which:

Figure 1 is a functional block diagram of a video encoder with an adaptive motion
estimator according to one embodiment of the present invention;

20 Figure 2 is a functional block diagram of an adaptive motion estimator according to
one embodiment of the present invention;

Figure 3 illustrates the outcome of performing a vector quantisation on a group of MB
motion vectors according to one embodiment of the present invention;

Figure 4 illustrates how multiple search windows are defined by global motion
25 vectors within a reference picture according to the present invention;

Figure 5 is a flow-chart illustrating a particular example of how a group of motion
vectors may be partitioned into sub-groups, according to one embodiment of the present
invention; and

Figure 6 is a flow-chart illustrating a particular example of the motion characteristics
30 extraction, evaluation process for deciding which motion estimator to use, according to one

- 9 -

embodiment of the present invention.

Detailed Description of the Preferred Embodiments

A picture sequence encoder according to a preferred embodiment of the present invention
5 encodes each input picture by determining its picture coding type (I-, P-, B-picture), obtaining
MBs from the picture, subjecting MBs of P-picture or B-picture to a motion vector detection
process (frame and/or field, forward and/or backward) using a global motion estimator,
performing necessary motion compensation (predicted or interpolated) using the detected
motion vectors, and subjecting all MBs to a transform coder followed by a statistical coder.
10 The motion characteristics of past pictures are then collected and input into a controller to
determine the type of motion estimator to be used for subsequent pictures.

The global motion estimator is updated with MB motion vectors from the past processed
pictures by the adaptive motion estimator. The preceding pictures motion vectors are used
15 to generate one or more global motion vectors for each group of MBs in a new picture to be
coded based on the type of global motion estimator selected. Generated global motion vectors
are used to offset search windows of all MBs in the corresponding group of MBs. For the
case of more than one global motion vector, a comparison at MB level is done and the global
motion vector that gives the best result is chosen.

20

At the end of a picture, a maximum offset vector is determined from all local motion vectors
of the picture. The maximum offset vector is combined with the maximum search window
size to select the VLC tables for coding of motion vectors for the picture.

25 At the end of one or more pictures, a set of motion characteristics is collected from the MB
vectors supplied by the motion detector, such as size of motion vectors, distribution pattern
of motion vectors, statistical data of motion vectors belonging to each group of MBs and the
relationships between global motion vectors of sub-groups with the same group. These are
used for determining which type of motion estimator is to be used to code the subsequent
30 pictures(s). The validity period of each decision can be one picture or a plurality of

- 10 -

picture(s), after which another decision will be made on another picture or plurality of pictures.

A video encoder with an adaptive motion estimator according to a preferred embodiment of the present invention is illustrated in block diagram form in Figure 1. In the video encoder as shown, a moving picture sequence is input to a frame buffer 101 for recording and processing. The moving pictures sequence may be pre-processed in conventional ways before being received in the frame buffer 101.

10 A picture coding type (I, P or B-picture) is determined according to application needs for each picture in the input picture sequence. An I-picture is an intra-coded picture used mainly for random access or scene update. P-pictures use forward motion predictive coding with reference to a previously coded I or P picture (anchor picture), and B-pictures use forward and backward motion predictive coding with reference to previously coded I and/or P
15 pictures. An input picture sequence may be either a field or frame structured sequence coming from an interlaced or progressive source.

Macroblocks containing blocks of pixel values are derived from a picture to be coded from the picture data stored in the frame buffer 101. The MBs are derived on a row by row basis
20 starting from the leftmost MB to the rightmost MB, and the top row to the bottom row. MBs belonging to an I-picture are subjected to a transform coder 105 directly; and MBs belonging to a P-picture or B-picture are subjected to an adaptive motion estimator 102. It is also possible to subject MBs belonging to an I-picture to the adaptive motion estimator 102 for generation of error concealment motion vectors such as defined in the MPEG2 standard.

25

All necessary motion vectors, for example the frame and/or field, forward and/or backward, and 16x16/16x8/8x8 motion vectors, for each MB are detected by the adaptive motion estimator 102 by matching the MB to candidate blocks obtained from one or more search windows from a reference picture stored in a frame buffer 103. Different matching methods
30 such as the exhaustive search method, the logarithmic search method, multi-steps or

- 11 -

hierarchical search method, and search windows sizes and numbers may be utilised depending on application/implementation needs as well as the type of motion estimator selected within the adaptive motion estimator 102. Matching methods may also be implemented in various pixel resolutions, for example integer, half pel or quarter pel resolution. The matching
5 criterion may be based on minimum of absolute errors, square errors, or other suitable distortion functions. A detailed description of one form of the adaptive motion estimator 102 is presented hereinbelow in connection with Figure 2.

A motion compensation processor 104 is coupled to the adaptive motion estimator 102. In
10 motion compensation process 104, a MB coding mode, such as intra-coding, frame/field forward/ backward prediction, or frame/field interpolation, is first decided for each MB based on the detected motion vectors from the adaptive motion estimator 102. Necessary prediction errors are then generated based on the decided MB coding mode. An example of a MB coding mode decision may be found in the MPEG2 Test Model 5.

15

Macroblocks resulting from the motion compensation process 104 are the subjected to a transform coder 105 which exploits correlation within each MB and also its psycho-visual effects. Examples of transform coders may be found in the aforementioned MPEG1, MPEG2, H.261 and H.263 standards. An embodiment of a transform coder 105 according
20 to the MPEG2 Test Model 5 consists of a DCT, quantiser rate controller with adaptive quantisation, inverse quantiser, and inverse DCT. The transformed and quantised coefficients are inverse quantised and inverse transformed by the transform coder 105 to produce reconstructed MBs which are passed to the frame buffer 103 for future reference. Necessary inverse of motion compensation is also provided to each reconstructed MB by the motion
25 compensation process 104. Reference pictures formed by the reconstructed MBs are used in the adaptive motion estimator 102 and motion compensation process 104. In some applications or coding instances, it is also possible to take input pictures directly as reference pictures for the adaptive motion estimator 102.

30 A statistical coder 106 is coupled to the transform coder 105, which exploits statistical

- 12 -

redundancies in the received data, and multiplexes the results to produce the final compressed output bitstreams. As an example in the MPEG2 Test Model 5, the statistical coder 106 provides the zig-zag scanning and run-length encoding of the transformed and quantised coefficients, differential coding of the utilised motion vectors, and multiplexing of all results and necessary side information (e.g.. sequence/GOP/picture/slice/MB layer header information, picture coding types, MB coding modes, etc.). The statistical coder 106 utilises variable length codes (VLC) from VLC tables.

A functional block diagram of one form of the adaptive motion estimator 102 is illustrated in Figure 2. The adaptive motion estimator of this embodiment has two inputs 208, 209 and two outputs 210, 211. Current picture data blocks are supplied to a selector 201 of the adaptive motion estimator from the frame buffer 101 at input 209. Reference picture data is provided from the reference picture frame buffer 103 at input 209 which is coupled to a plurality of motion estimators 204, 205, 206 and 207. The selector 201 also receives input from a motion characteristics analyser 202. The motion estimators 204, 205, 206, 207 are controlled by the selector so that a selected one of them produces an output to the motion vector output 210, which is provided to the motion compensation processor 104 (Figure 1). The output motion vector is also fed back to a global motion estimator 203 and to the motion characteristics analyser 202. The global motion estimator 203 is coupled to provide data to the motion characteristics analyser and the motion estimators 204, 205, 206, 207. The global motion estimator 203 also produces a maximum search range output which is provided to the statistical coder 106 (Figure 1).

The global motion estimator 203 determines one or more global motion vectors for each row of MBs from an input picture. In this particular embodiment, three global motion vectors are computed: one representing the average motion vector of the whole row, the other two global motion vectors representing two sub-groups of MBs from the row differentiated by some motion characteristics. For this embodiment, the two sub-groups are obtained by performing two-level vector quantisation on the MB motion vectors in the row. An example of a two-level quantisation process is illustrated in flow diagram form in Figure 5.

- 13 -

Referring to Figure 5 beginning at step 501, firstly a global motion vector *gmv* is computed by averaging the MB motion vectors in the current row (step 502). The global motion vector *gmv* is then perturbed at step 503 to obtain separate initial values for secondary motion vectors *gmv1* and *gmv2*. The vector quantisation algorithm then enters an iteration loop beginning at step 504 whereby the distance of each of the MB motion vectors from *gmv1* and *gmv2* are being compared to separate the MB motion vectors into two groups, *Group1* and *Group2*. The secondary motion vectors *gmv1* and *gmv2* are then re-computed from the motion vectors in the respective new *group1* and *group2*. At step 504 a test is applied to determine if a preset maximum number of iterations has yet been reached. If the maximum number of iterations has been reached then the procedure ends at step 511 with the primary and secondary global motion vectors which have been computed. If the iteration number limit has not been reached, then the distances between each of the respective macroblock motion vectors and the secondary global motion vectors *gmv1* and *gmv2* are computed at step 505. At steps 506, 507 and 508, each of the MB motion vectors is determined to be closer to either *gmv1* or *gmv2*. If the MB motion vector is closer to the current value of *gmv1* then *gmv2* then it is assigned to *Group1*, otherwise it is assigned to *Group2*. In the next step (509), the value of *gmv1* is temporarily preserved in a register *prev_gmv1* and the value of *gmv2* is preserved in *prev_gmv2*, following which values for the *gmv1* and *gmv2* are recomputed according to the MB motion vectors allocated to the respectively to *Group1* and *Group2*. The vector quantisation procedure then carries out another test at step 510 to determine whether to terminate the iteration loop. The test at step 510 involves a comparison of *prev_gmv1* with recomputed *gmv1* and *prev_gmv2* with recomputed *gmv2*. If the previous and recomputed values of the secondary global motion vectors are within a small preset tolerance (i.e. the iteration loop leaves *gmv1* and *gmv2* essentially unchanged) then the procedure ends at step 511 with the computed global motion vectors *gmv*, *gmv1* and *gmv2*. Thus, the process of distance comparison and group reassignment continues until the value of *gmv1* and *gmv2* remains unchanged, or the maximum number of iterations allowed is reached.

An example of a distribution of MB motion vectors is illustrated in Figure 3, for the case of eight MB motion vectors in a row. In this Figure, plain circles represent the placement of

- 14 -

individual macroblock motion vectors in the row. The primary global motion vector which constitutes the combination of all of the individual MB motion vectors is indicated by the symbol at 301. The vector quantisation procedure determines two groupings of MB motion vectors, the first group (*Group1*) comprising the motion vectors labelled as 304 and the
5 second group (*Group2*) being the motion vectors labelled 305. The secondary global motion vectors *gmvl* and *gm2* are respective averages of the motion vectors from *Group1* and *Group2*, and are indicated in the Figure at 302 and 303. This Figure graphically illustrates the relationships between the eight MB vectors, the global motion vector 301 representing the whole row (*gm*), and the two secondary global motion vectors 302 and 303 representing the
10 two sub-groups (*gm1* and *gm2*) are as shown. Note that as an alternative to using vector average, other functions may be used to represent each of the groups, such as a median function, most common vector, etc.

The calculated global motion vectors are used in subsequent picture(s) to offset the search
15 window(s). This is diagrammatically illustrated in Figure 4 for the case of two global motion vectors per row. The first search window for a current MB to be coded is determined from a reference picture 401 by first determining the position of a co-sited macroblock 402 on the reference picture 401. The position of the macroblock 402 is offset according to the first global motion vector 403 generated for the MB row to which the current MB belongs. This
20 results in a new offset MB position 404 as illustrated. Then, the horizontal and vertical search ranges are included, centred around the offset MB position 404, to form the search window 405 for the current MB. The search window 405 is used for motion vector detection for the current MB. The same procedure is carried out for the second global motion vector 406 to obtain the offset MB 407 and search window 408. The two best macroblock matching
25 predictions obtained from the two search windows are compared and the one giving the best prediction is chosen, with the corresponding MB motion vector assigned to the current MB. If only one global motion vector is used (depending on the type of motion estimator chosen), then the procedure illustrated previously for the first search window is carried out.

30 As mentioned earlier, different matching methods such as the exhaustive search method, the

- 15 -

logarithmic search method, multi-step or hierarchical search method, and search windows in different sizes and numbers may be utilised. Referring again to Figure 2, in this embodiment four different motion estimation schemes are considered, labelled *FS_GMV1*, *FS_GMV2*, *HS_GMV1*, and *HS_GMV2* in the motion estimator blocks 204, 205, 206 and 207 respectively. All of the motion estimators 204, 205, 206, 207 are coupled to the global motion estimator 203 to obtain global motion vector(s) to offset the search window, but the motion estimators differ in terms the type of block-matching technique employed and number of global motion vectors used. For example, *FS_GMV1* uses one global motion vector and an exhaustive search block-matching technique. This technique gives the best accuracy among the three, but gives the smallest search range/area given the same amount of computational processing. *FS_GMV2* uses two global motion vector and an exhaustive search blocking matching technique. This method is useful when there are two groups of motion within the pictures; it gives more accurate results than *HS_GMV2* but requires much more computation (e.g. more hardware) for a meaningful and effective search range. *HS_GMV1* uses one global motion vector but a hierarchical search block-matching technique followed by multi-step refinements. This gives a good trade off between accuracy and area of coverage. Therefore the search range/area can be a few times larger than that of *FS_GMV1* (given the same hardware) depending on the amount of sub-sampling done on the picture. *HS_GMV2* uses two global motion vectors and a hierarchical search block-matching plus multi-step refinement technique. This method gives better performance when there are significant difference in foreground/background motion.

The selector 201, together with the motion characteristics analyser 202 are responsible for deciding which of the schemes is to be used, at picture level, based on the motion characteristics of past pictures. The motion characteristics analyser 202 is fed with motion vector information from the global motion estimator 203 and the output of one of the motion estimators 204 to 207 (depending on which one was selected for the current picture). From this information, some metrics representing the distribution pattern of motion vectors in the picture are extracted, such as the distance between each sub-group of motion vectors, the magnitude of group/sub-group global motion vectors, etc. These metrics are passed to the

- 16 -

selector 201 for evaluation after which a decision will be made on which motion estimator to use for subsequent picture(s). In this exemplary embodiment, only motion estimators *FS_GMV1* (204), *HS_GMV1* (206) and *HS_GMV2* (207) are used. The *FS_GMV2* motion estimator 205 is excluded in this case to keep the hardware size small, it can be included (and
5 will give very good results) if hardware is expanded sufficiently for the *FS_GMV2* motion estimator to have a meaningful and effective search range.

Since correlation of the current picture and pictures in its vicinity is high in the absence of scene changes, the type of motion estimation scheme selected is often suitable for pictures in
10 the vicinity of the current picture. For this particular embodiment, the assignment scheme is such that if one of the schemes, say *FS_GMV1*, is associated with a particular picture (say picture N), then those pictures that used global motion vectors derived from picture N will also use *FS_GMV1* for the motion vector detection process in adaptive motion estimator 102.

15 One example of the motion characteristics analysis, evaluation and motion estimator selection process used in this embodiment is illustrated in flow diagram form in Figure 6, beginning with step 601. The distances of the MB motion vectors from their corresponding global motion vectors are first computed and their average value, *gmv_var*, obtained for the picture (step 602). The value of *gmv_var* is a measure of compactness of the distribution of motion
20 vectors. Note that other metrics that measure the compactness of a group of values can also be used, for example the variance of MB motion vectors about their global motion vector. The value of *gmv_var* is compared to a certain preselected threshold, *threshold1*, (step 603) and if the *gmv_var* is smaller than *threshold1* then the motion estimator *FS_GMV1* scheme is selected (step 604). If the value of *gmv_var* is determined to be larger than *threshold1* at
25 step 603 then another metric measuring how far apart two distinct groups of MB vectors in a row is computed (step 605). This basically divides the MB motion vectors in a row into two sub-groups using the two-level vector quantisation and measuring the distance between the two global motion vectors representing the groups. A count of how many rows in the picture contain distinctly far apart sub-groups of motion vectors is obtained and compared to
30 another predetermined threshold, *threshold3*, at step 606. The result of this comparison,

- 17 -

together with another comparison of *gmv_var* against a second threshold, *threshold2*, (step 607) determines whether the strategy *HS_GMV1* (step 608) or *HS_GMV2* (step 609) will be selected.

- 5 It will be appreciated from the foregoing detailed description that embodiments of the present invention provide improved methods and apparatus for motion vector detection in a video data encoder. A motion estimator controller is used to select from among a set of motion estimators the most suitable one for a segment consisting of one or more pictures. Selection is based on the motion characteristics of past pictures. The controller is therefore able to
- 10 adaptively choose the motion estimator that gives the best trade off in terms of accuracy and area of coverage, given a certain fixed hardware complexity. All of these features enable increases in the performance of the encoder, and enable it to provide high accuracy motion estimation for slow moving sequences while still having the ability to cover fast moving sequences that require large search range/areas. Embodiments of the invention also allow
- 15 adaption of the VLC tables to the different search range selected, resulting in a more efficient bit allocation to the coding of motion vectors.

Embodiments of the present invention also reduce the computational complexity and improves the performance of the encoder by using a global motion estimator with multiple search

20 windows. This enables better prediction of pictures containing not just translational, but also zooming, sheer and multiple clusters of different foreground/background motion. With a fixed global motion vector, the hardware (e.g. search window cache) required for a large search range/area implementation is greatly reduced.

- 25 It will be readily understood by those skilled in the art that the invention described herein can be practically implemented in a number of different ways. For example, the principles of the invention can be incorporated in an integrated circuit for encoding/decoding video data, in which case the functions of the invention may be embodied in the circuit design, firmware, microcode or the like. The invention may just as easily be implemented on general purpose
- 30 data processing apparatus, in which case the functions of the invention may be embodied in

- 18 -

a sequence of computer software instructions.

The foregoing detailed description of the preferred embodiments has been presented by way of example only, and is not intended to be considered limiting to the scope of the present
5 invention which is defined in the claims appended hereto.

Claims:

1. A method for motion estimation for use in encoding a picture in a moving pictures sequence wherein data representing the picture in the sequence comprises a plurality of data
5 blocks, the method comprising the steps of:
selecting a group of related data blocks from the plurality of data blocks of the picture;
for each data block in the selected group, obtaining a corresponding block motion vector from a previously processed picture in the moving pictures sequence;
determining a primary global motion vector for the selected group from all of the
10 corresponding block motion vectors;
classifying the block motion vectors from the selected group into a plurality of sub-groups;
determining a plurality of secondary global motion vectors corresponding to the respective sub-groups from the block motion vectors classified in the respective sub-groups;
15 and
selecting the primary and/or at least one of the secondary global motion vectors for use in defining one or more search windows for each block in the selected group to enable block matching with a reference picture.
- 20 2. A method as claimed in claim 1, wherein the block motion vectors from the selected group are classified into the sub-groups according to spatial clustering of the block motion vectors.
3. A method as claimed in claim 1 or 2, wherein the primary and secondary global
25 motion vectors are computed from an average of the block motion vectors within the respective corresponding group or sub-group.
4. A method as claimed in claim 1, including determining a match between each block
in the selected group and a matching-block in the one or more search windows for that block
30 in the reference picture, and determining a computed motion vector between each block in

- 20 -

the selected group and its matching block.

5. A method as claimed in claim 4, including storing the computed motion vector for each block for use as a block motion vector for processing subsequent pictures in the moving
5 pictures sequence.

6. A method as claimed in claim 5, including generating a computed motion vector for each block in the picture and determining a maximum offset vector from the largest of the computed motion vectors, and using the maximum offset vector to select a variable length
10 coding level for the computed motion vectors for the picture.

7. A method as claimed in claim 1, including selecting and performing one of a plurality of motion estimation and search schemes based on selected characteristics of the primary and secondary global motion vectors, the plurality of motion estimation and search schemes
15 employing various combinations of the global motion vectors and matching-block search window schemes.

8. A method for encoding moving pictures data from a sequence of moving pictures in which each picture in the sequence is represented by a plurality of data blocks corresponding
20 to non-overlapping areas of the picture, the method comprising:

selecting a group of related data blocks from the plurality of data blocks of a picture;
for each data block in the selected group, obtaining a corresponding block motion vector from a previously processed picture in the moving pictures sequence;

determining a plurality of global motion vectors for the selected group, each of the
25 global motion vectors being formed from a plurality of the corresponding block motion vectors;

analysing the global motion vectors and determining a metric representing a distribution pattern thereof;

selecting a motion estimator scheme on the basis of the distribution pattern metric, the
30 motion estimator scheme being selected from amongst a plurality of motion estimator schemes

- 21 -

each having a different combination of search strategy and number of global motion vectors;
performing data block-matching with a reference picture using the selected motion estimator scheme to generate a block motion vector; and
encoding the picture data including the block motion vectors.

5

9. A method as claimed in claim 8 including a step of determining, at the end of processing of a particular picture, a maximum search range using the all of the global motion vectors determined for the picture, and selecting a variable length coding scheme in accordance with the maximum search range for encoding the block motion vectors for the

10 picture.

10. A method for improved data block matching in a moving pictures encoder for encoding a sequence of pictures each comprising a plurality of data blocks, comprising the steps of:

15 processing at least a picture in the sequence to obtain block motion vectors for the data blocks therein with respect to a reference picture;

generating a plurality of global motion vectors for the picture, each global motion vector being generated from a plurality of block motion vectors from a respective group of related blocks in the picture;

20 analysing the global motion vectors to determine a metric representing a distribution pattern thereof;

selecting a motion estimation scheme from amongst a plurality of motion estimation schemes, for data block matching of at least one subsequent picture in the sequence; and

performing data block matching of at least one subsequent picture in the sequence

25 using the selected motion estimation scheme, said global motion vectors and preselected search window characteristics.

11. A moving pictures encoder for encoding a sequence of pictures each comprising a plurality of data blocks, including an adaptive data block matching apparatus comprising:

30 a global motion estimator coupled to receive block motion vectors for data blocks of

- 22 -

a previously processed picture with respect to a reference picture for generating a plurality of global motion vectors for the picture, each global motion vector being generated from a plurality of block motion vectors from a respective group of related blocks in the picture;

a motion characteristics analyser coupled to receive the global motion vectors from
5 the global motion estimator for analysing the global motion vectors to determine a metric representing a distribution pattern thereof;

a selector coupled to receive the distribution pattern metric from the motion characteristics analyser for selecting a motion estimation scheme from amongst a plurality of motion estimation schemes, for data block matching of at least one subsequent picture in the
10 sequence; and

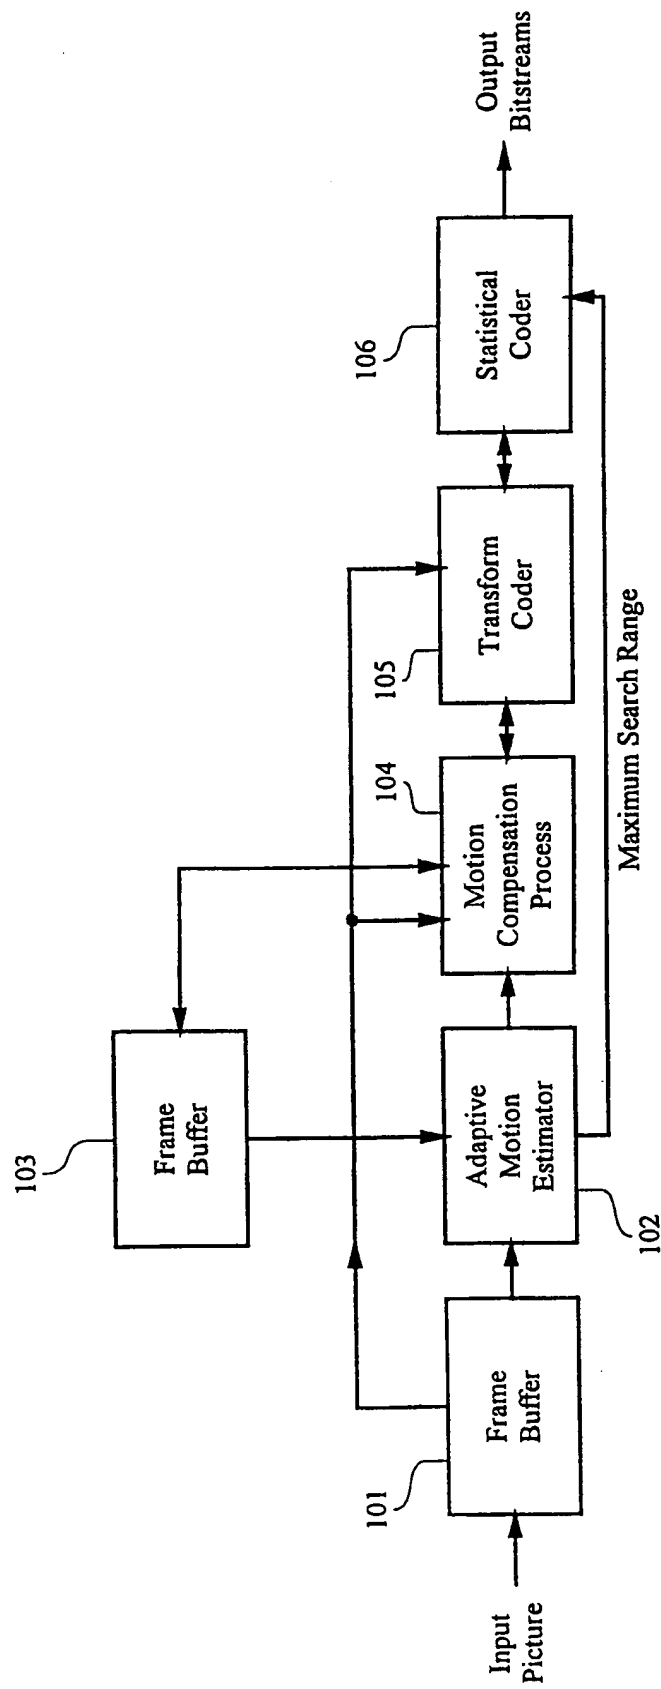
a plurality of motion estimators controlled by said selector and coupled to receive said global motion vectors for performing data block matching of at least one subsequent picture in the sequence using the selected motion estimation scheme, said global motion vectors and preselected search window characteristics.

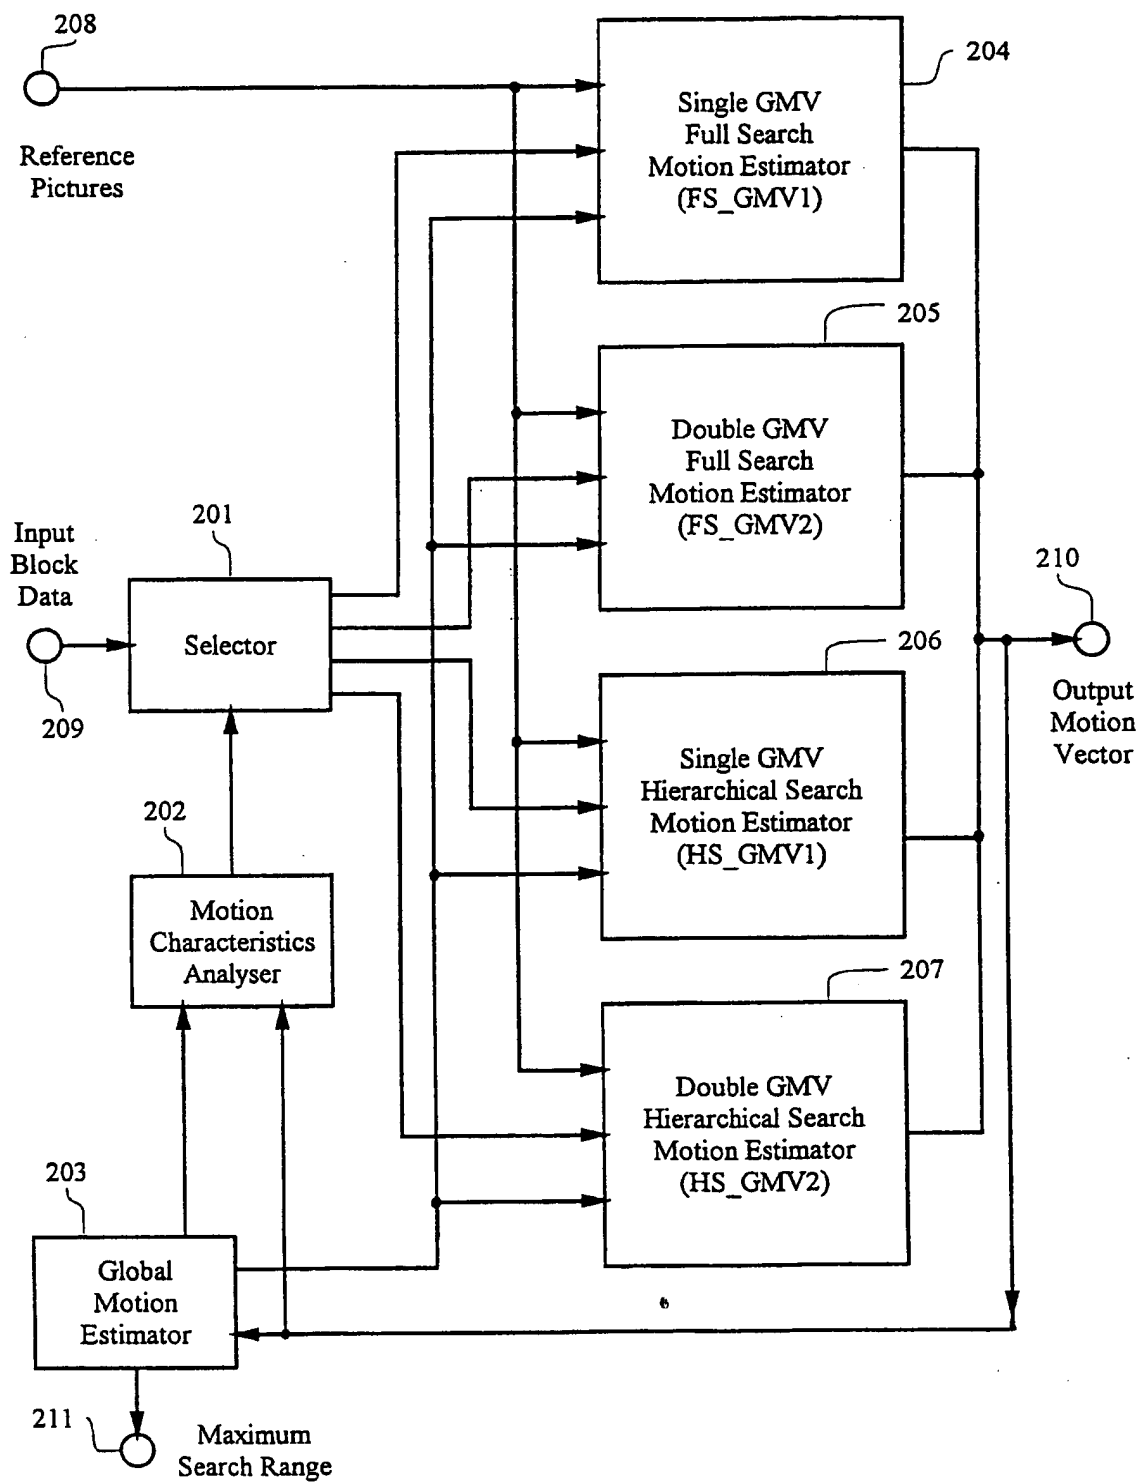
15

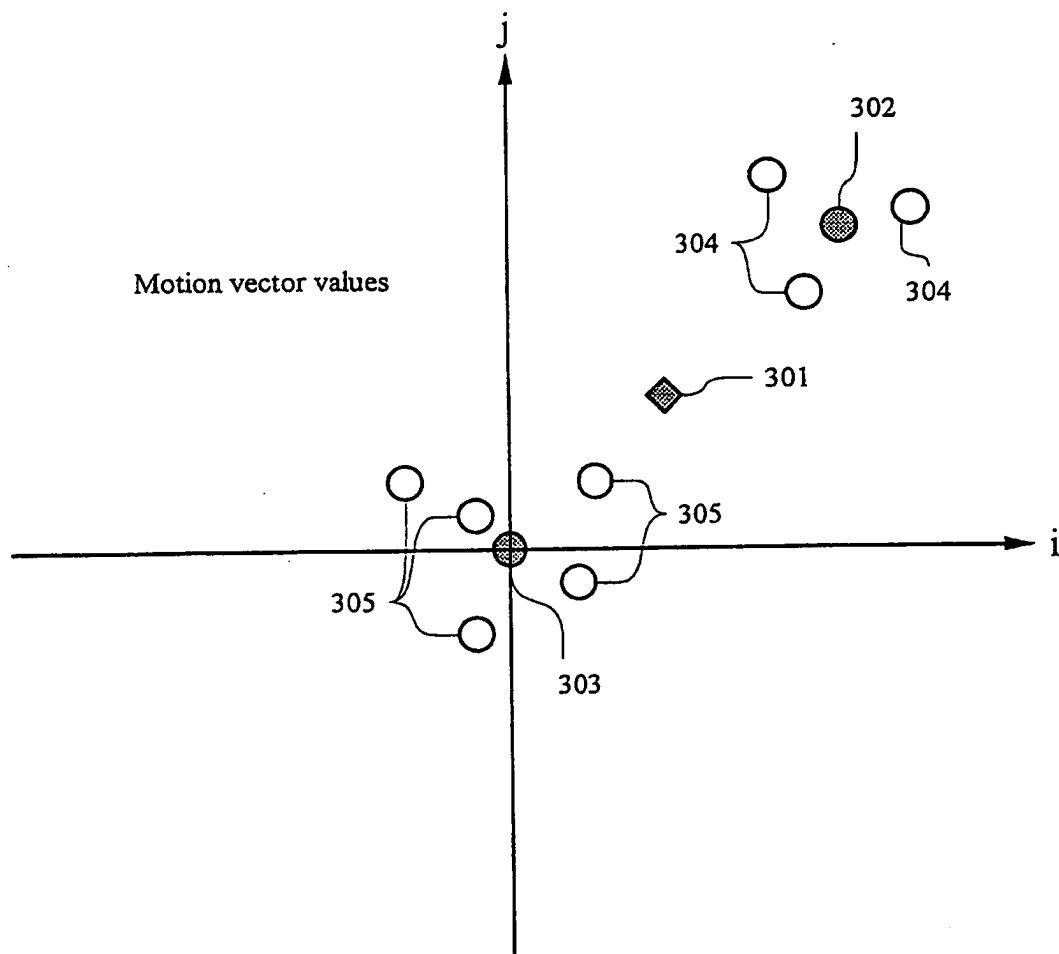
12. A moving pictures encoder as claimed in claim 11, wherein the global motion estimator includes means for determining a maximum search range on the basis of the global motion vectors.

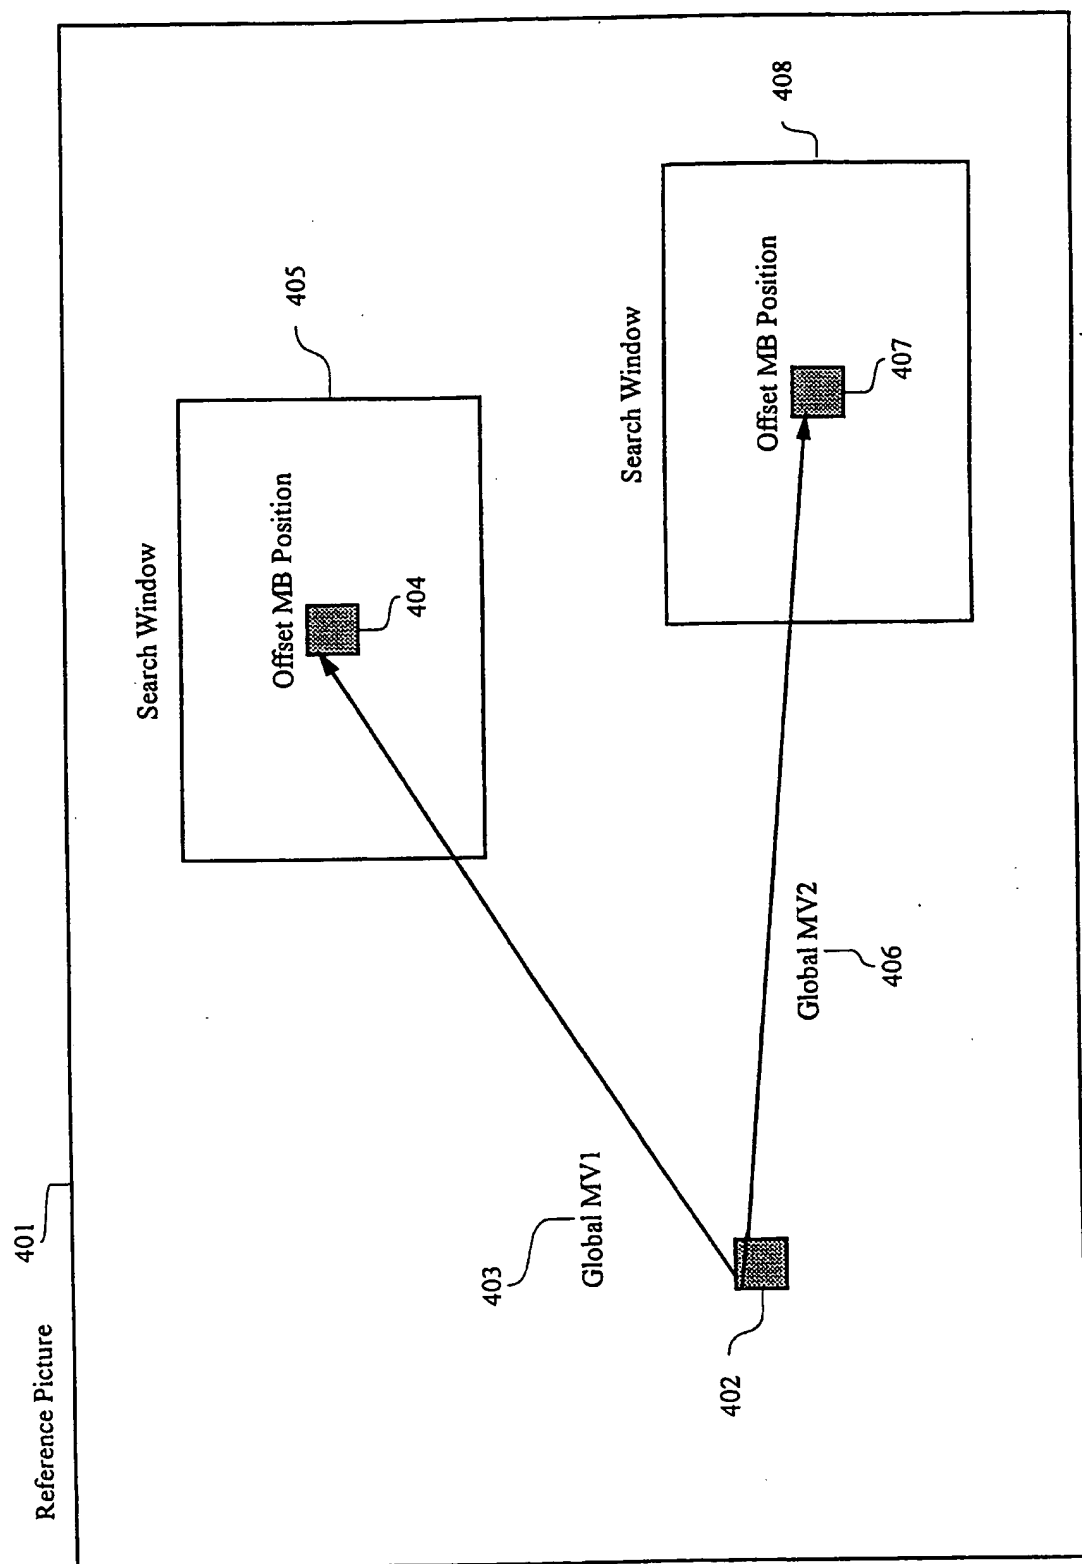
20 13. A moving pictures encoder as claimed in claim 12, including a statistical coder employing variable length codes, and wherein the statistical coder is coupled to the global motion estimator to receive said maximum search range, and wherein the statistical coder selects a variable length coding scheme for block motion vectors of a picture on the basis of said maximum search range.

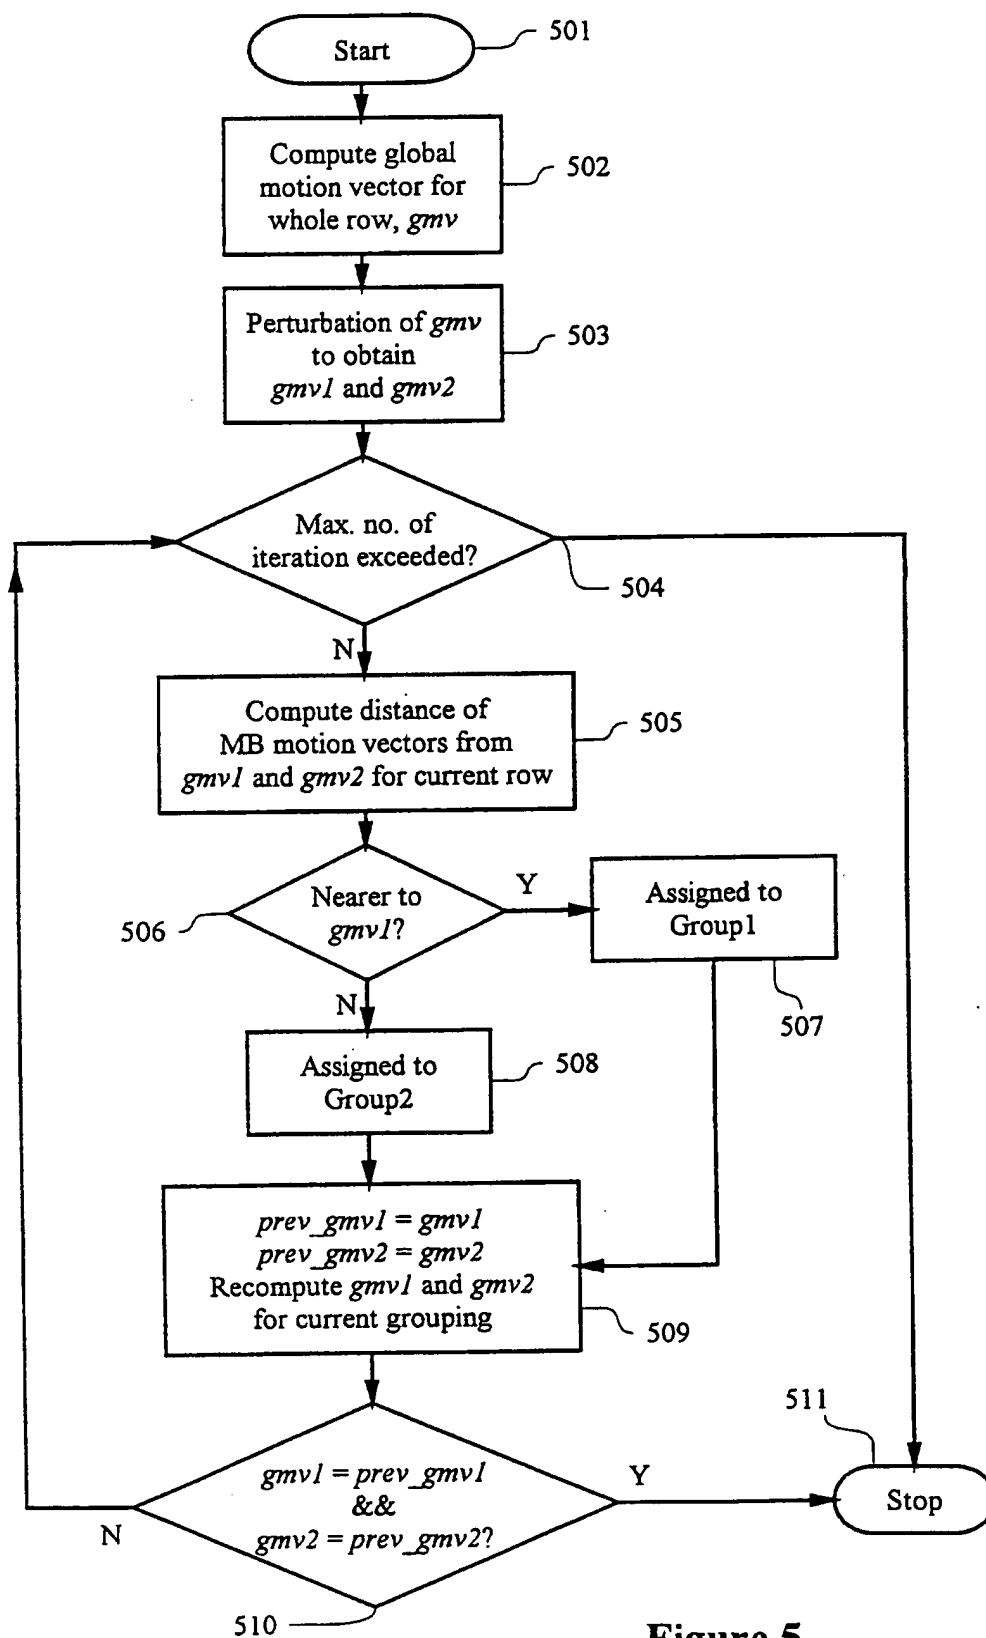
25

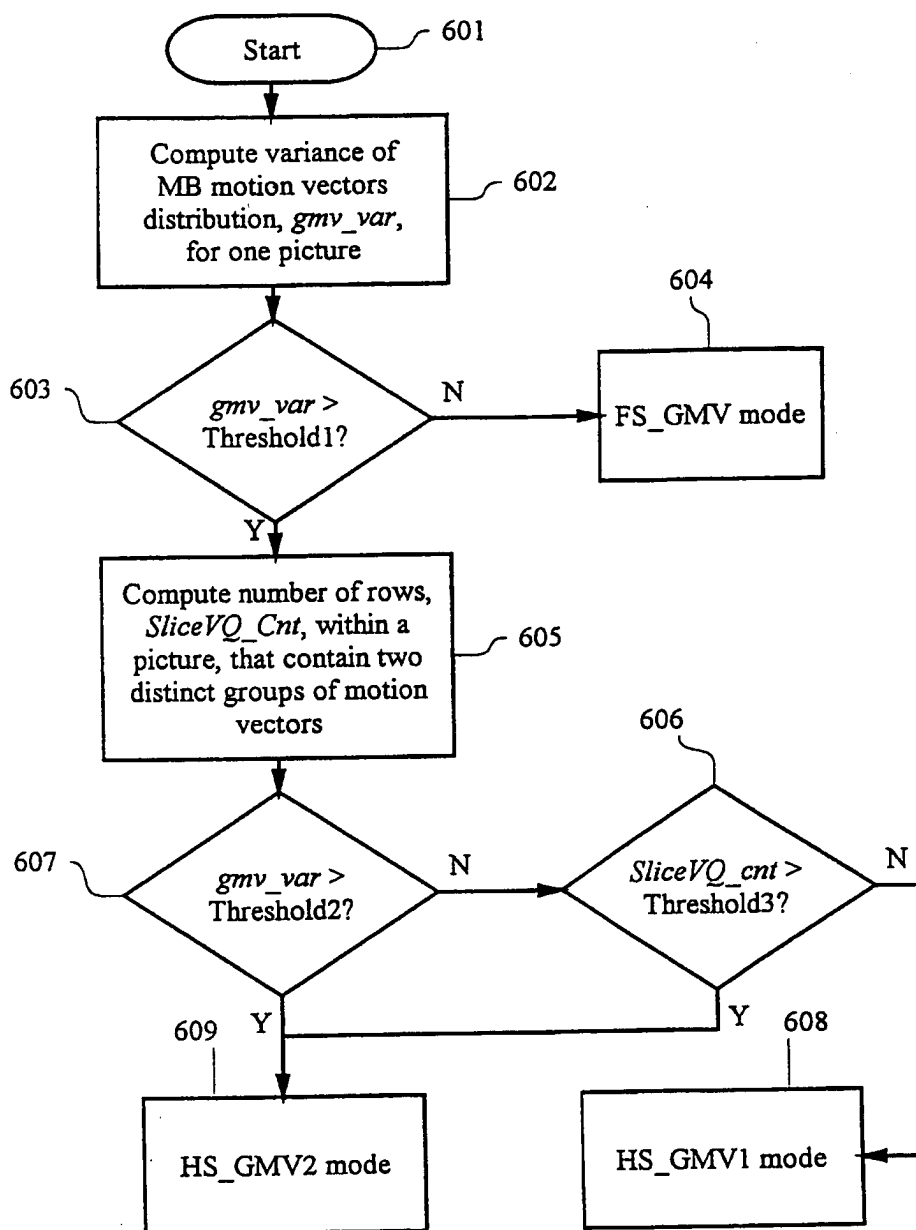
**Figure 1**

**Figure 2**

**Figure 3**

**Figure 4**

**Figure 5**

**Figure 6**

INTERNATIONAL SEARCH REPORT

Inter nal Application No

PCT/SG 99/00041

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ZIEGLER M: "HIERARCHICAL MOTION ESTIMATION USING THE PHASE CORRELATION METHOD IN 140 MBIT/S HDTV-CODING" PROCEEDINGS OF THE INTERNATIONAL WORKSHOP ON HDTV,NL,AMSTERDAM, ELSEVIER, vol. WORKSHOP 3, page 131-137 XP000215234 paragraph '03.2! ---	1-13
A	HANG H -M ET AL: "MOTION ESTIMATION FOR VIDEO CODING STANDARDS" JOURNAL OF VLSI SIGNAL PROCESSING,NL,KLUWER ACADEMIC PUBLISHERS, DORDRECHT, vol. 17, no. 2/03, 1997, page 113-136 XP000724575 ISSN: 0922-5773 page 126, right-hand column, line 10 -page 127, left-hand column, line 7 --- -/--	1-13



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 January 2000

Date of mailing of the international search report

24/01/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel.: (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Berbain, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SG 99/00041

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 10 191347 A (CASIO COMPUT CO LTD) 21 July 1998 (1998-07-21) abstract ---	1-13
A	EP 0 831 642 A (NIPPON ELECTRIC CO) 25 March 1998 (1998-03-25) abstract page 4, line 7 - line 19 ---	1-13
A	WO 95 30310 A (MOTOROLA INC) 9 November 1995 (1995-11-09) abstract page 8, line 4 - line 19 ---	1-13
A	EP 0 468 279 A (ANT NACHRICHTENTECH) 29 January 1992 (1992-01-29) abstract figure 1 ---	1-13
A	WO 98 43434 A (PANDEL JUERGEN ; SALAI ALBERT (DE); SIEMENS AG (DE)) 1 October 1998 (1998-10-01) abstract figure 4 -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SG 99/00041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 10191347 A	21-07-1998	NONE	
EP 0831642 A	25-03-1998	JP 10098730 A	14-04-1998
WO 9530310 A	09-11-1995	US 5537155 A	16-07-1996
		AU 688893 B	19-03-1998
		AU 2273595 A	29-11-1995
		CN 1128097 A	31-07-1996
		EP 0711488 A	15-05-1996
		JP 8512189 T	17-12-1996
EP 0468279 A	29-01-1992	DE 4023449 C	23-01-1992
		AT 129112 T	15-10-1995
		DE 59106655 D	16-11-1995
WO 9843434 A	01-10-1998	DE 19712785 C	16-07-1998
		EP 0970586 A	12-01-2000